DETECTAMET

Technical Data Sheet

Document Reference	100
Date of Issue	24 th Oct 2024
Revision Number	001
Date of Last Revision	24 th Oct 2024

100 Standard Ink Refills



Technical Data Sheet Applicable To:

100-i53	Standard Refill Red Ink
---------	-------------------------

Industry Usage

These refills are perfect for our HD Retractable, Elephant Retractable, Stainless Steel Retractable and Metal Stick pens and are fully detectable (excluding lnk)

Features and Benefits

- Metal detectable and X-ray visible
- Manufactured from detectable shatter proof plastic
- Writing length approx. 9,400M (30,840")
- Fully detectable housing and end cap
- For ambient conditions between 0°c and 30°c (32 to 86°f)

• Writing line width 1mm (39.4mils)

Material and Compliance Information:

The above is manufactured using pigments which are in accordance with: -

- o European Resolution AP (89) 1
- o Recommendation IX of the BfR for colouring plastics
- o EN71-3 Toy regulation
- o EU regulation EU No 2019/1381 amending Regulation EU No 1935/2004
- o Is based on a polymer carrier that is compliant with: -
- o EU regulation EU No 2020/1245 amending and correcting Regulation (EU) No 10/2011
- o EU regulation EU No 2019/1381 amending Regulation EU No 1935/2004
- Has been produced according to Regulation 2023/2006/EC on good manufacturing practice for materials and articles intended to come into contact with food, applicable to plastic raw materials.

This compliance statement is based on information supplied by the polymer and pigment manufacturers, migration testing according to Regulation 10/2011, migration modelling and quality control systems in place at Detectamet.

REACH – No substances of very high concern (SVHC) above the 0.1% weight (w/w) threshold limit are present in the materials.

Regulations and Standards

We confirm that the above-mentioned products are suitable for use in contact with all food types and are in conformity with the applicable requirements of the following regulations and standards:

- Regulation (EC) no.1935/2004 on Materials and Articles intended to come into contact with food.
- Commission Regulation (EU) No.10/2011 on Plastic materials intended to come into contact with food including its updates Regulation 1282/2011 and Regulation 1183/2012.
- Regulation (EC) no. 2023/2006 on Good Manufacturing Practice for materials and articles intended to come into contact with food.
- Council of Europe Resolution AP 89/1 on the use of Colorants in Plastic Materials coming into contact with food.
- US FDA 21 CFR 177.1520 (Olefin polymers) with colorants and additives cleared for use through listing in 178.3297 (Colorants for polymers), 178.2010 (antioxidants and/or stabilisers for polymers, or other respective parts of the FDA regulations.

Migration test data obtained under short-term repeat use test conditions (6dm2/kg food) has demonstrated that levels of overall migration and specific migration of additives from these products will not exceed the legal limits with all food types.

Test Simulants	Food Types	Testing Condition
		2 hours at 70C, Repeat use. Test OM3 of regulation 10/2011

2 hours at 70C, Repeat use. Test OM3 of regulation 10/2011

Dual-use food additives may be present but any migration into food will be minimal.

This compliance statement is based on information supplied by the polymer and pigment manufacturers, migration testing according to Regulation 10/2011, migration modelling and quality control systems in place at Detectamet.

General Information:

Maximum use Temperature: 100 °C Maximum wash Temperature:

121°c

Maximum use Temperature: Do not store at deep freeze temperatures prior to use.


Cleaning:

It is recommended that prior to and after use, scrapers are cleaned, disinfected & sterilized, as appropriate to their intended use (to minimise risk of microbial Growth and cross contamination, maximizing their efficiency and durability).

Refill Flight

The above is manufactured using pigments which are in accordance with: -

- o Is manufactured using pigments which are in accordance with
- o European Resolution AP (89) 1
- o Recommendation IX of the BfR for colouring plastics
- o Is manufactured using pigments which are compliant to -
- o EN71-3 Toy regulation
- o Is based on a polymer carrier that is compliant with: -
- o EU regulation EU No 10/2011 as amended

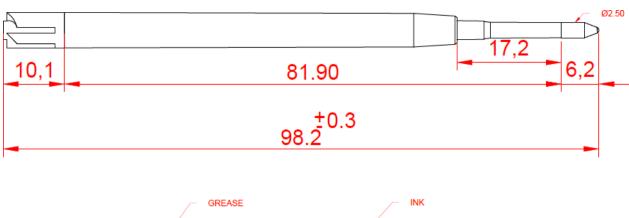



All dimensions are in mm



1. Identification

Trade name SPL Red

Application of the substance / the mixture Used as inks for sketch pens, fine liners and all kinds of writing instruments.

- 2. Hazard(s) identification
- Classification of the substance or mixture

GHS08 Health hazard



Muta 2.

H341 Suspected of causing genetic defects.

GHS05 Corrosion



Eve Dam 1.

H318 Causes serious eye damage.

GHS09 Environment



Aquatic Chronic 2.

H411 Toxic to aquatic life with long lasting effects.





Skin irrit 2.

H315 Causes skin irritation.

Classification according to Directive 67/548/EEC or Directive 1999/45/EC Not applicable.

Information concerning particular hazards for human and environment The product has to be labelled due to the calculation procedure of international guidelines.

Classification system The classification was made according to the latest GHS editions of international substances lists and expanded upon from company and literature data.











Label elements

Labelling according to GHS guidelines The product has been classified and marked in accordance with GHS directives on hazardous materials.

Hazard-determining components of labelling Chrysoidine, 2-Phenoxyethanol

Safety phrases Keep out of the reach of children. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. Do not empty into drains, dispose of this material and its container at hazardous or special waste collection point. Wear suitable protective clothing, gloves and eye/face protection. If swallowed, seek medical advice immediately and show this container or label.

Classification system

NFPA ratings (scale 0 - 4)



Health = 1

Fire = 1

Reactivity = 0

HMIS-ratings (Scale 0-4)



Health = 1

Fire = 1

Reactivity = 0

Other hazards
 Results of PBT and vPvB
 assessment PBT Not
 applicable.
 vPvB Not applicable.







3. Composition/information on ingredients

Chemical characterization: Mixtures

Description Mixture: consisting of the following components.

·	<u> </u>	
Dangerous components		
122-99-6	2-Phenoxyethanol	35-42%
100-51-6	Benzyl alcohol	7-9%
509-34-2	3',6' -bis(diethylamino)spiro[isobenzofuran-1(3H),9'- [9H]xanthene]-3-one	7-9%
495-54-5	Chrysoidine	3-5%
112-80-1	Oleic acid, pure	1-3%
110-98-5	1,1'-oxydipropan-2-ol	0.5-2%
112-90-3	(Z)-octadec-9-enylamine	0.1-1%
Non-Dangerous components		
111-90-0	2-(2-ethoxyethoxy)ethanol	1-3%
9003-39-8	Polyvinyl pyrrolidone	0.1-0.5%
25054-06-2	Formaldehyde, polymer with cyclohexanone	33-38%
61813-75-0	C. I. Solvent Blue 43	0.1-0.5%

4. First aid measures

• Description of first aid measures

After inhalation Remove person to fresh air. Consult physician.

After skin contact Immediately wash with water and soap and rinse thoroughly.

After eye contact Rinse opened eye for several minutes under running water. Then consult a doctor. After swallowing If symptoms persist consult doctor.

Most important symptoms and effects, both acute and delayed Cause skin irritation Indication of any immediate medical attention and special treatment needed No further relevant information available.

5. Firefighting measures

Extinguishing media

Suitable extinguishing agents Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide. Special hazards arising from the substance or mixture No further relevant information available.

Advice for firefighters

Protective equipment Wear self-contained breathing apparatus and protective clothing to prevent contact with skin.







6. Accidental release measures

Personal precautions, protective equipment and emergency procedures Wear protective equipment. Keep unprotected persons away.

Environmental precautions Do not allow product to reach sewage system or any water course.

Inform respective authorities in case of seepage into water course or sewage system. Do not allow to enter sewers/ surface or ground water.

Methods and material for containment and cleaning up Absorb with liquid-binding material (sand, diatomite, acid binders, universal binders, sawdust). Dispose contaminated material as waste according to item 13. Ensure adequate ventilation.

Reference to other sections

See Section 7 for information on safe handling.

See Section 8 for information on personal protection equipment. See Section 13 for disposal information.

7. Handling and storage

Precautions for safe handling Open and handle receptacle with care.

Conditions for safe storage, including any incompatibilities.

Storage

Requirements to be met by storerooms and receptacles Prevent any seepage into the ground. Store in a cool location.

Information about storage in one common storage facility Store away from foodstuffs.

Further information about storage conditions Keep container closed.

Specific end use(s) Used as inks for sketch pens, fine liners and all kinds of writing instruments.

8. Exposure controls/personal protection

Additional information about design of technical systems No further data; see item 7.

Control parameters

Components with limit values that require monitoring at the workplace:		
100-51	-6 Benzyl alcohol	
WEEL	Long-term value: 10 ppm	
111-90-	0 2-(2-ethoxyethoxy)ethanol	
WEEL	Long-term value: 25 ppm	

Additional information The lists that were valid during the creation were used as basis.







Exposure controls

Personal protective equipment:

General protective and hygienic measures Keep away from foodstuffs, beverages and feed. Immediately remove all soiled and contaminated clothing. Wash hands before breaks and at the end of work. Avoid contact with the skin. Avoid contact with the eyes and skin.

Breathing equipment In case of brief exposure or low pollution use respiratory filter device. In case of intensive or longer exposure use respiratory protective device that is independent of circulating air.

Protection of hand




The glove material has to be impermeable and resistant to the product/ the substance/ the preparation. Due to missing tests no recommendation to the glove material can be given for the product/ the preparation/ the chemical mixture. Selection of the glove material on consideration of

the penetration times, rates of diffusion and the degradation.

Material of gloves The selection of the suitable gloves does not only depend on the material, but also on further marks of quality and varies from manufacturer to manufacturer. As the product is a preparation of several substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application.

Penetration time of glove material The exact break through time has to be found out by the manufacturer of the protective gloves and has to be observed.

Eye Protection



Body protection Protective work clothing.

9. Physical and chemical properties

Information on basic physical and chemical properties		
Generalinformation		
Appeara		
nce Form	Fluid	
Colour	According to product specification	
Odour	Characteristic	
Odour threshold	Not determined	
Change in condition		
Melting point/Melting	Undetermined	
range Boiling	205°C (401°F)	
point/Boiling range		
Flash point	101°C (214°F)	
Flammability (solid,	Not applicable	
gaseous)		







Ignition temperature	435°C (815°F)
Auto igniting	Product is not self-igniting
Danger of explosion	Product does not present an
	explosion hazard
Density	Not determined
Solubility in / Miscibility	
with	Not miscible or difficult to mix
Water	No further relevant information
Other	available
information	







10. Stability and reactivity

Reactivity

Chemical stability

Thermal decomposition / conditions to be avoided No decomposition if used according to specifications.

Possibility of hazardous reactions No dangerous reactions known.

Conditions to avoid No further relevant information available.

Incompatible materials Strong oxidising agent.

Hazardous decomposition products Carbon oxides.

11. Toxicological information

Information on toxicological effects

Acute toxicity:

LD/LC50 values that are relevant for classification:		
111-90-0 2-(2-ethoxyethoxy)ethanol		
Oral	LD50	6031 mg/kg bw (mouse)
Dermal		9143 mg/kg bw (rabbit(new Zealand white))
110-98-5 1,1'-oxydipropan-2-ol		
Oral	LD50	14850 mg/kg (Rat)

Primary irritant effect

On the skin CAS No. 112-80-1. Administration of 500 mg of Oleic Acid onto the skin of rabbit caused mild irritating effect. On the eye CAS No. 122-99-6. The instillation of substance 2 Phenoxy Ethanol at 0.1 mL concentration in rabbit eye caused irritating effect. CAS No. 110-90-0. Administration of Di Propylene Glycol into the eye of rabbit at 500 mg of concentration caused mild irritation.

Sensitization No sensitizing effects known.

Additional toxicological information The product shows the following dangers according to internally approved calculation methods for preparations: irritant.

Carcinogenic categories

IARC (International Agency for Research on Cancer)		
None of the ingredients is listed		
NTP (National Toxicology Program)		
None of the ingredients is listed		







OSHA-Ca (Occupational Safety & Health Administration)

None of the ingredients is listed







12. Ecological information

Toxicity

Aquatic toxicity As the substance Oleyl Amine (CAS No. 112-90-3) and Chrysodine (CAS No. 495-54-5) having classification as Aquatic Acute 1 and Aquatic chronic 1, contributes only 0.50% and 4% respectively in the final mixture, so the classification of mixture is considered as Aquatic Chronic 2.

Persistence and degradability No further relevant information available.

Bio accumulative potential No further relevant information available.

Mobility in soil No further relevant information available.

Ecotoxic effects

Remark Toxic for

fish

Additional ecological information

General notes

Water hazard class 3 (Self-assessment): extremely hazardous for water. Do not allow product to reach ground water, water course or sewage system, even in small quantities. Danger to drinking water if even extremely small quantities leak into the ground. Also poisonous for fish and plankton in water bodies. Toxic for aquatic organisms

Results of PBT and vPvB assessment PBT Not applicable.

vPvB Not applicable.

Other adverse effects No further relevant information available.

13. Disposable considerations

Waste treatment method

Recommendation Must not be disposed of together with household garbage. Do not allow product to reach sewage system.

Uncleaned packaging

Recommendation Disposal must be made according to official regulations.







14. Transport information

14. Transport information	
UN-Number	
DOT, ADR, IMDG,	UN3082
IATA	
UN proper shipping	
name	Environmentally hazardous substances, liquid, n.o.s.
DOT	3082 environmentally hazardous substances, liguid, n.o.s.
ADR	(chrysoidine, (Z) -octadec-9- enylamine)
	Environmentally hazardous substance, liquid, n.o.s. chrysoidine, (Z) -
IMDG	octadec-9- enylamine), marine pollutant.
	Environmentally hazardous substance, liquid, n.o.s. chrysoidine, (Z) -
IATA	octadec-9- enylamine)
Transport hazard	
class(es)	
DOT	
Alb.	
¥	9 Miscellaneous dangerous substances
Cla	and articles 9
SS	
Lab	
el	
ADR, IMDG, IATA	
4	
√1110 √¥ 2>	
2	
Cla	9 Miscellaneous dangerous substances and articles
SS	9
Lab	
el	
Packing group	
DOT, ADR, IMDG,	III
IATA	
Environmental hazards	Product contains environmentally hazardous substances:
	chrysoidine.
Marine pollutant	Yes
	Symbol (fish and
Special marking	tree) Symbol
(ADR) Special	(fish and tree)
marking (IATA)	Symbol (fish and
	tree)







Special precautions	Warning: miscellaneous dangerous substances and articles.
for user Danger code	90
(Kemler)	F-A,S-F
EMS number	Acids
Segregation groups	
Transport in bulk according to Annex II of MARPOL73/78 and the IBC Code	Not applicable







Transport/additional information	
ADR	
Excepted quantities (EQ)	Code: E1
	Maximum net quantity per inner
	packaging: 30ml Maximum net quantity
	per outer packaging: 1000ml
IMDG	
Limited quantities (LQ)	5L
Excepted quantities (EQ)	Code: E1
	Maximum net quantity per inner packaging:
	30ml Maximum net quantity per outer
	packaging: 1000ml
UN "model regulation"	UN3082, environmentally hazardous substance,
	liquid, n.o.s. chrysoidine, (Z) -octadec-
	9-enylamine).

15. Regulatory information

• Safety, health and environmental regulations/legislation specific for the substance or mixture.

Sara

<u> </u>		
Section 355 (extremely hazardous substances)		
None of the ingredients is listed		
Section 313 (specific toxic chemical listings)		
None of the ingredients is listed		
TSCA (Toxic Substances Control Act)		
122-99-6	2-Phenoxyethanol	
25054-06-	Formaldehyde, polymer with cyclohexanone	
2	,,	
100-51-6	Benzyl alcohol	
509-34-2	3',6'-bis(diethylamino)spiro[isobenzofuran-1(3H), 9'- [9H]xanthene]-3-one	
495-54-5	Chrysoidine	
111-90-0	2-(2-ethoxyethoxy)ethanol	
112-80-1	Oleic acid, pure	
110-98-5	1,1'-oxydipropan-2-ol	
112-90-3	(Z)-octadec-9-enylamine	
9003-39-8	Polyvinyl pyrrolidone	







Proposition 65

Chemicals known to cause cancer
None of the ingredients is listed
Chemicals known to cause reproductive toxicity for females
None of the ingredients is listed
Chemicals known to cause reproductive toxicity for males
None of the ingredients is listed
Chemicals known to cause development toxicity None of the ingredients is listed
1

Carcinogenic categories

EPA (Environmental Protection Agency)	
None of the ingredients is listed	
TLV (Threshold Limit Value established by ACGIH)	
TLV (ACGIH): 1000ppm	
NIOSH-Ca (National Institute for Occupational Safety	
and Health)	
None of the ingredients is listed	

Product related hazard information The product has been classified and marked in accordance with directives on hazardous materials.

Hazard-determining components of labelling Chrysoidine, 2-Phenoxyethanol

Safety phrases Keep out of the reach of children. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. Do not empty into drains, dispose of this material and its container at hazardous or special waste collection point. Wear suitable protective clothing, gloves and eye/face protection. If swallowed, seek medical advice immediately and show this container or label.

National regulations

Other regulations, limitations and prohibitive regulations User to follow national laws and regulations.

16. Other information

This information is based on our present knowledge. However, this shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship.







Department issuing SDS Product safety department.











Abbreviations and acronyms

ADR: Accord European sur le transport des marchandises dangereuses par Route (European

Agreement concerning the International Carriage of Dangerous Goods by Road)

IMDG: International Maritime Code for Dangerous Goods DOT: US Department of

Transportation

IATA: International Air Transport Association

ACGIH: American Conference of Governmental Industrial

Hygienists EINECS: European Inventory of Existing

Commercial Chemical Substances ELINCS: European List

of Notified Chemical Substances

CAS: Chemical Abstracts Service (division of the American Chemical Society) NFPA: National Fire Protection Association

(USA)

HMIS: Hazardous Materials Identification

System (USA) LC50: Lethal concentration, 50

percent

LD50: Lethal dose, 50 percent

Skin Irrit. 2: Skin corrosion/irritation, Hazard Category 2 Eye Dam. 1: Serious eye damage/eye irritation, Hazard Category 1 Muta. 2: Germ cell mutagenicity, Hazard

Category 2

Aquatic Chronic 2: Hazardous to the aquatic environment - Chronic Hazard, Category 2

Sources

Occupational Safety & Health Administration (OSHA) https://www.osha.gov/Publications/OSHA3514.html

- Data from ECHA dossier of CAS No. 111-90-0


http://apps.echa.europa.eu/registered/data/dossiers/DISS-9d828fb4-1e4f-6452-e044-00144f67d249/DISS-9d828fb4-1e4f-6452-e044-00144f67d249 DISS-9d828fb4-1e4f-6452-e044-00144f67d249.html

- RTECS data for CAS No. 112-80-1 http://www.expub.com/Members/Documents/UE54FQYM56KXTDVN807HBSGW3F7DCO.pdf
- Drugfuture Data for CAS 110-98-5





Standard Refill Tip



1.00mm BNP/TC

It is recommended that prior to and after use, scrapers are cleaned, disinfected & sterilised, as appropriate to their intended use (to minimise risk of microbial Growth and cross contamination, maximising their efficiency and durability).

detectamet.global

^{*}No warranty is given or implied with respect to this information or patent infringement. Detectamet Ltd do not accept liability for loss or damage arising from the use of this information. Results are based on a test sample, our general experience and information from suppliers. Data and results may be confirmed by the buyer by testing for its intended conditions of use.*

Safety You Detect